


1. Open Internet Browser. Goto www.salda.lt

The screenshot shows the SALDA website homepage. The browser address bar displays <http://www.salda.lt/en/welcome>. The page features the SALDA logo, a search bar, and a navigation menu with links for Home, Products, Product selection, About SALDA, News, and Contacts. A large banner image shows industrial machinery with labels for VENTILATION, HEAT PUMPS, DUST EXTRACTION, SUBCONTRACTING, and AIR DISTRIBUTION. Below the banner, there is a 'SALDA in the World' section with a world map and a 'News' section with two articles: 'Upcoming events! Meet us at exhibitions MCE 2016 (Milan) and Nordbygg 2016 (Stockholm)' and 'Air handling units exceed new ErP 2016 requirements'.

2. Goto Products and press Downloads


The screenshot shows the 'Downloads' page on the SALDA website. The browser address bar displays http://www.salda.lt/en/products/category/download_page/. The page features a navigation menu with links for Home, Products, Product selection, About SALDA, News, and Contacts. A large banner image shows a white air handling unit on a bed of soil with a small green plant growing next to it. Below the banner, there is a list of download categories: Ventilation, Heat pumps, Dust extraction, Subcontracting, Air distribution, and Downloads. The 'Downloads' category is selected, showing three items: 'VentMaster V5' (Modular air handling units' 3D modeling and selection software), 'MB Gateway FIRMWARE' (Download the latest firmware version of MB Gateway), and 'Ptouch FIRMWARE' (Download the latest firmware version of Ptouch remote control panel). A footer link is visible: <http://www.salda.lt/saldus/kcfinder/upload/files/ptouch-1.00.7.zip>.

3. Download Ptouch firmware to computer and open download folder

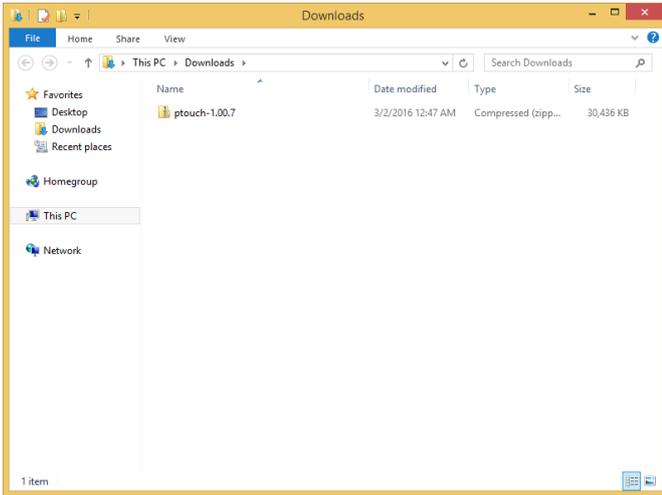


5. Copy Extracted files.

Select all files. Press mouse right button and click copy

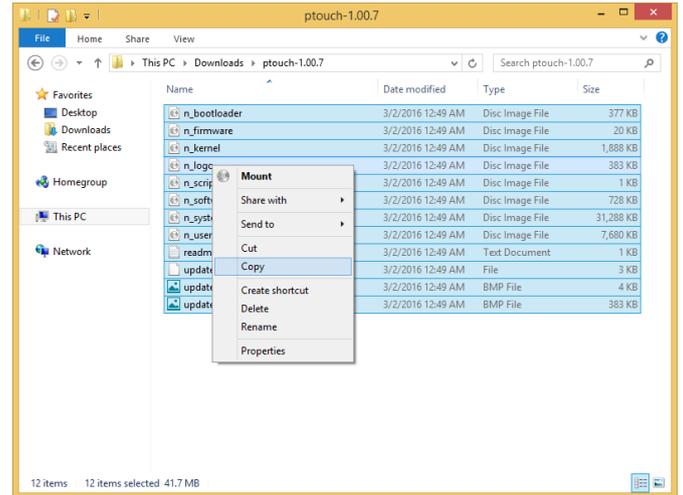


4. Extract downloaded file.



Right click on downloaded file and click Extract all

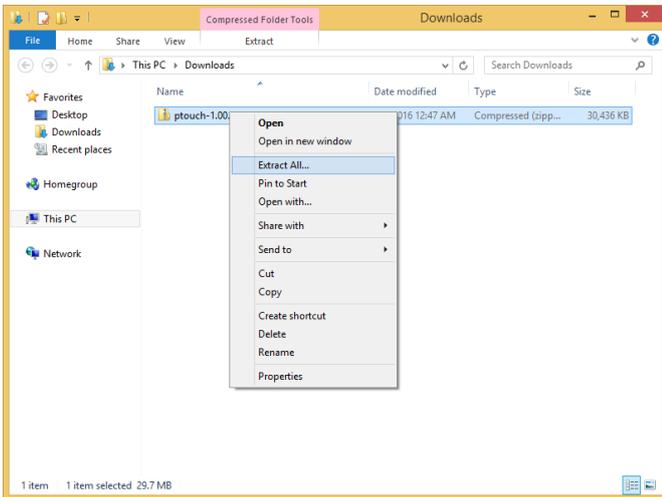


Open SD Card drive

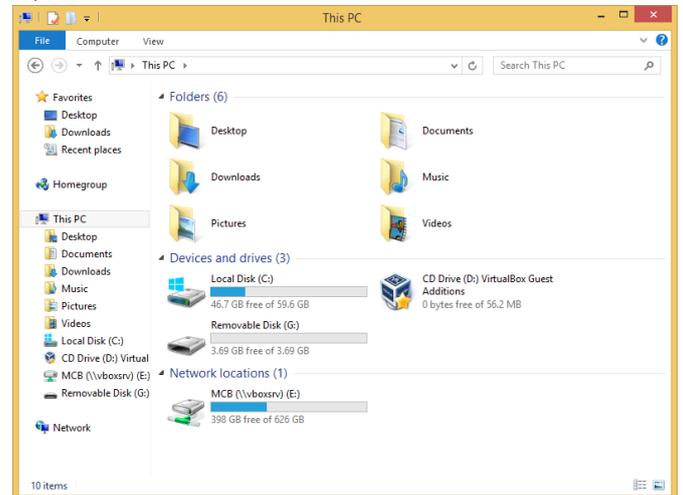

Paste files into SD Card

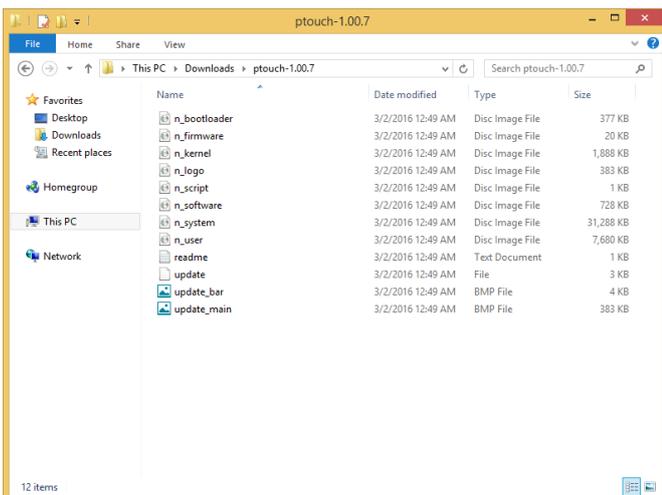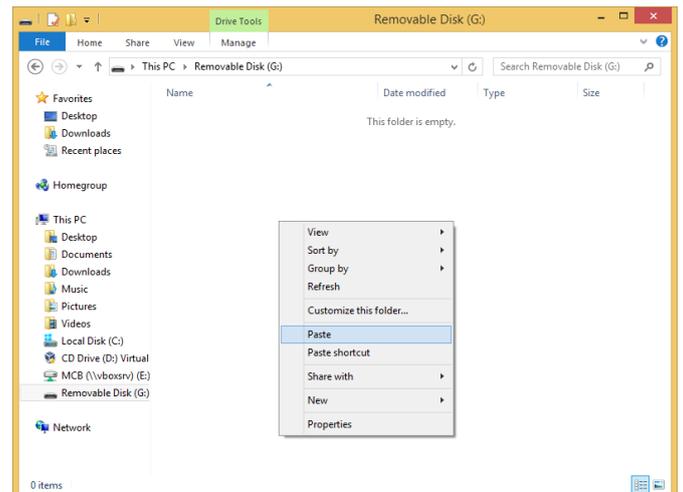

Now you should have Ptouch update files on SD card

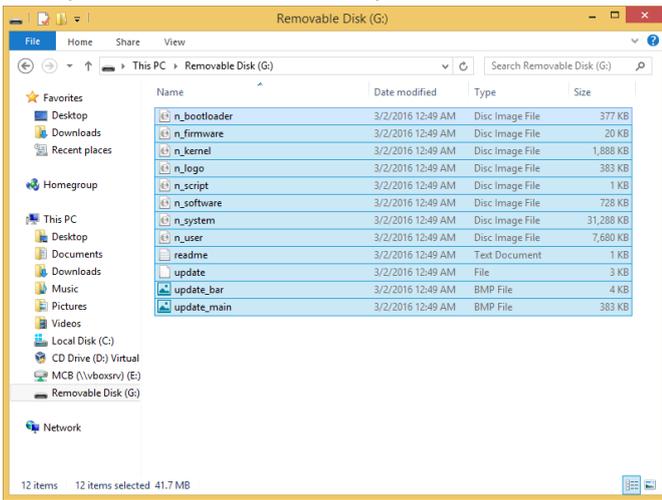

6. Insert microSD card into Ptouch



7. Turn off power supply or press reset button in the pin hole.



8. Ptouch restarts and enters update mode.

SALDA

UPDATING TO VERSION: **1.00 Build 7**



9. After update it will start and you should see new version information in MENU » ABOUT



10. Remove microSD card from Ptouch